



## Pro Line


### [Listen Only Pro]

**Ear muff with high comfort and noise attenuation. Equipped with built-in stereo speakers and detachable down lead. Can be connected to CD and MP3-players, walkmans, scanners, communication radios etc.**

Designed to meet industrial safety standards. Electronic sound limiter protects against harmful sound levels irrespective of the output of the external device.

Suitable within motor sports, heavy industry and for spare time use.

- Available both as headband and helmet attachment.
- Adjustable headband pressure for individual fit.
- Electronic output limited to a maximum of 82dB(A).
- Detachable down lead with 3.5 mm stereo plug included. Fits to most CD or MP3-players.
- The ear muff can be used without down lead with maintained noise attenuation capability.
- Hygiene kit and an assortment of different down leads available.
- Weight: 234 g (Headband) 228 g (Helmet mounted)

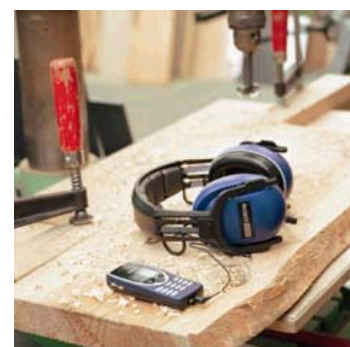

### Headband

Tested according to EN 352-1 at FICH, Finland (0403)

Frequency [Hz]	63	125	250	500	1000	2000	4000	8000
Mean value [dB]	12,1	10,7	12,4	21,4	29,5	31,7	40,1	41,7
Std.dev. [dB]	2,3	1,9	2,9	3,2	3,7	2,8	5,3	4,5
APV value [dB]	9,8	8,8	9,5	18,2	25,8	28,9	34,8	37,2

SNR = 24 dB, H = 30 dB, M = 20 dB, L = 13 dB

### Helmet mounted

Tested according to EN 352-3 at FICH, Finland (0403)

Frequency [Hz]	63	125	250	500	1000	2000	4000	8000
Mean value [dB]	12,4	10,1	14,5	23,6	29,8	31,2	37,5	39,4
Std.dev. [dB]	2,4	2,7	1,9	3,1	2,9	3,6	4,9	2,7
APV value [dB]	10,0	7,4	12,6	20,5	26,9	27,6	32,6	36,7

SNR = 25 dB, H = 30 dB, M = 22 dB, L = 14 dB